


1

1.1 -7008
 1.2 -7008 50 220
 1.3 -7008
 1.4 (EAC),
 1.5 II 60598-1-2011.
 1.6 2000 3.1 15150-69,

2

-175...265
 -50
 -150...295
 -8
 -940
 -800
 1%
 LM-80 (IES) TM-21-11 (IESNA) - 153 000
 -(52 ± 5)
 -(5 ± 2)
 -60...140
 (cos) - 0,9
 30804.4.4-2013 - I
 -IP30
 30 40°
 UI94 - v2
 -10
 x x -182 110 42

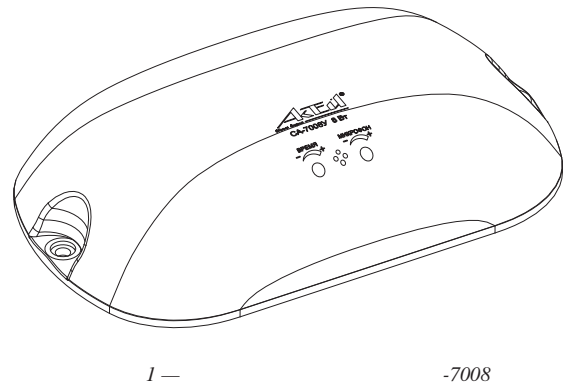

3

— -7008 — 1
 — — 1
 — — 1
 — — 1

4

-7008
 ()
 1.

5

5.1
 5.2
 5.3

6

6.1
 6.2
 6.3 ()
 6.4 .9

7

7.1

5 ()

7.2

7.3

7.4

7.5

2

7.6

3.

7.7

(

)

7.8

4,


«

».

	I	II	III
()	●	●	●
	○	●	○
	○	○	●


2—

-7008



3—

-7008

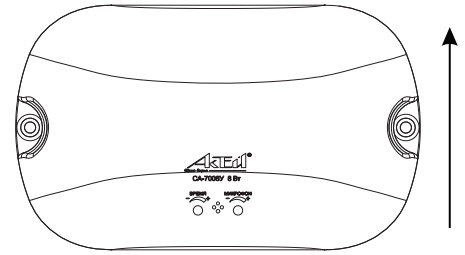

4—

-7008

8

I.

()

II.

(/ 20 %)

III.

I

9

10

60

72

11

70 %

40

50 °C.

—6

: « - » - . 27



!